



Raised access floors

FACTORY FINISHED PANELS

**WOODCORE
PANELS**

SOFT COVERINGS

 **CBI**
EUROPE
HI-TECH INTERIORS

PANELS

WOODCORE PANELS

ALUFOIL BACKING / SOFT COVERINGS

woodcore high density 600 x 600 mm

alufoil backing 0.05 mm

PT30

ALUFOIL BACKING

S-P-03623 EPD®

environdec.com




PT38

ALUFOIL BACKING

S-P-03624 EPD®

environdec.com

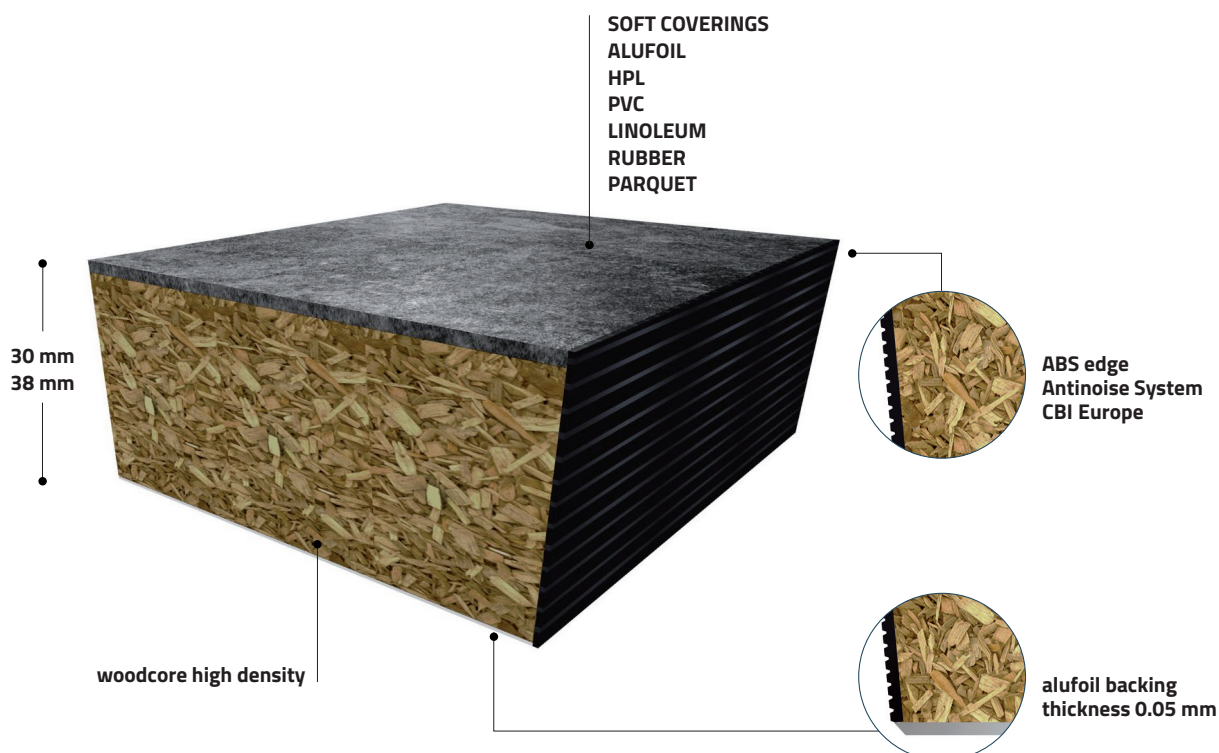

TECHNICAL SPECIFICATIONS		PT30 h 30 mm / kg 7,60	PT38 h 38 mm / kg 10,00
fire reaction UNI EN 13501-1		Bfl-s1	
fire resistance UNI EN 13501-2		REI 30	
TECHNICAL FEATURES UNI EN 12825			
	center of panel - deflection 2,5 mm	3,2 > 4,0 KN	
	center of panel - ultimate load	9,0 > 11,5 KN	
	loading class	4 > 5	
	center of panel - deflection 2,5 mm	3,3 > 4,2 KN	
	center of panel - ultimate load	9,5 > 12,0 KN	
	loading class	4 > 6	
	center of panel - deflection 2,5 mm	3,5 > 4,4 KN	
	center of panel - ultimate load	10,0 > 12,6 KN	
	loading class	5 > 6	

The load resistance tests have been performed in CBI Europe's internal laboratory and simulate the test method indicated by UNI EN 12825: 2001. The results obtained at a height of 20 cm may vary depending on the installation and the general conditions of the site. If the project requires a certification from a third party this must be explicitly requested.

PANELS

WOODCORE PANELS

GALVANIZED STEEL DISH / SOFT COVERINGS

woodcore high density 600 x 600 mm

galvanized steel 0.5 mm

PT30V

GALVANIZED STEEL DISH
S-P-03265 **EPD**[®]
environdec.com




PT38V

GALVANIZED STEEL DISH
S-P-03626 **EPD**[®]
environdec.com




SOFT COVERINGS
ALUFOIL
HPL
PVC
LINOLEUM
RUBBER
PARQUET

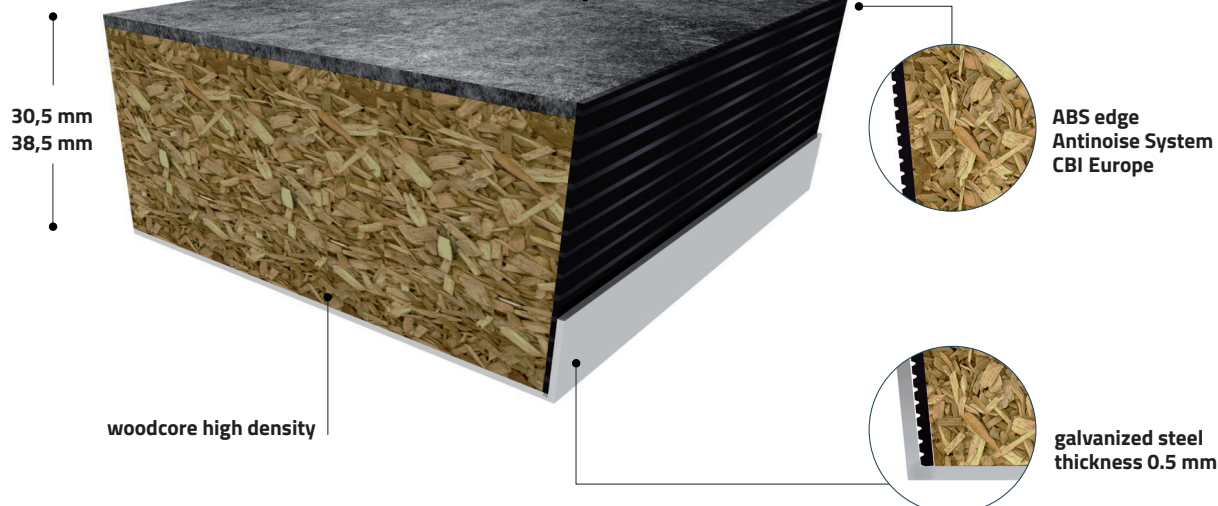

TECHNICAL SPECIFICATIONS	PT30V	PT38V
	h 30,5 mm / kg 9,00	h 38,5 mm / kg 11,50

fire reaction UNI EN 13501-1	Bfl-s1
fire resistance UNI EN 13501-2	REI 30


TECHNICAL FEATURES UNI EN 12825

	center of panel - deflection 2,5 mm	3,5 > 5,5 KN
	center of panel - ultimate load	10,6 > 14,5 KN
	loading class	5 > 6
	center of panel - deflection 2,5 mm	3,6 > 5,8 KN
	center of panel - ultimate load	11,2 > 15,2 KN
	loading class	5 > 6
	center of panel - deflection 2,5 mm	3,9 > 6,1 KN
	center of panel - ultimate load	11,8 > 16,0 KN
	loading class	5 > 6

The load resistance tests have been performed in CBI Europe's internal laboratory and simulate the test method indicated by UNI EN 12825: 2001. The results obtained at a height of 20 cm may vary depending on the installation and the general conditions of the site. If the project requires a certification from a third party this must be explicitly requested.


STRUCTURES

FLOOR SYSTEM **CBI/ST** without stringers

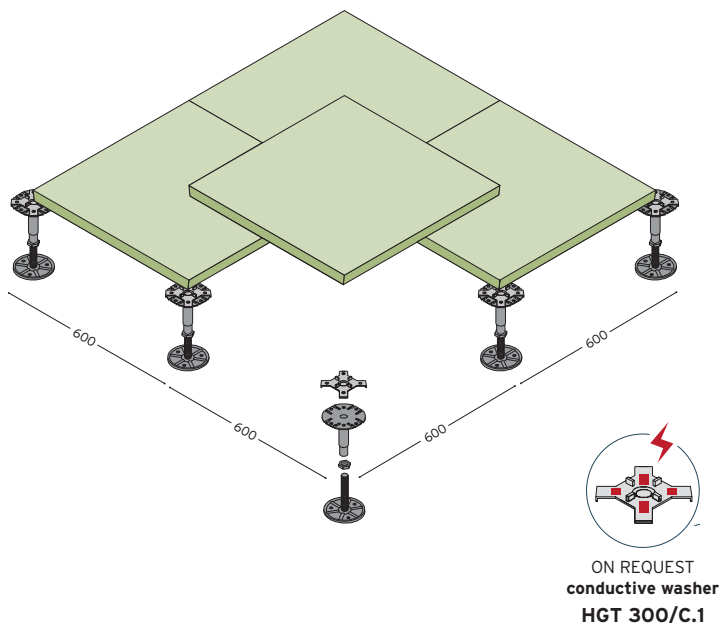


adjustable pedestal

CBI F12




code	height/mm	weight/pcs
CBIO3F12	45/65	0,23 Kg
CBIO4F12	61/90	0,24 Kg
CBIO5F12	83/130	0,27 Kg
CBIO6F12	120/200	0,30 Kg

CBI F16



code	height/mm	weight/pcs
CBIO3F16	45/65	0,30 Kg
CBIO4F16	61/90	0,34 Kg
CBIO5F16	83/130	0,39 Kg
CBIO6F16	120/200	0,45 Kg
CBIO7F16	170/290	0,55 Kg

FLOOR SYSTEM **CBI/ST** with stringers

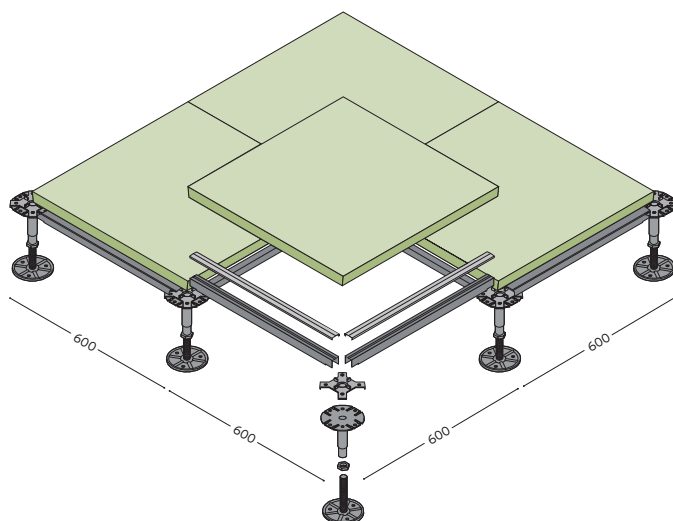


adjustable pedestal

CBI F12




code	height/mm	weight/pcs
CBIO3F12	45/65	0,23 Kg
CBIO4F12	61/90	0,24 Kg
CBIO5F12	83/130	0,27 Kg
CBIO6F12	120/200	0,30 Kg

CBI F16




CBIO3F16	45/65	0,30 Kg
CBIO4F16	61/90	0,34 Kg
CBIO5F16	83/130	0,39 Kg
CBIO6F16	120/200	0,45 Kg
CBIO7F16	170/290	0,55 Kg
CBIO8F16	250/390	0,70 Kg
CBIO9F16	350/490	0,83 Kg
CBIO10F16	450/650	1,00 Kg


T536/A HEAVY



T536/L LIGHT



T536/S SPACER




stringers

open section stringer made with galvanised steel,
Clip-On System with PVC washer.

T536/A 30 x 25 x 1 mm
T536/L 30 x 25 x 0,7 mm
T536/S 20 x 25 x 0,7 mm

STRUCTURES




FLOOR SYSTEM **CR**

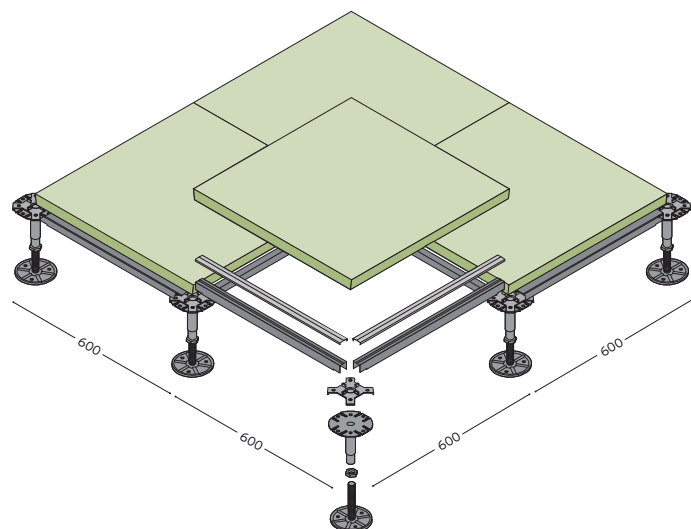

T536/A HEAVY

T536/L LIGHT


TT535



ON REQUEST
conductive washer
HGT 300/C.1

adjustable pedestal

CR




code	height/mm	weight/pcs
CR00F16	120/200	0,55 Kg
CR01F16	200/350	0,68 Kg
CR02F16	350/550	0,94 Kg
CR03F18	550/800	1,34 Kg
CR04F20	800/1050	1,85 Kg
CR05F20	1050/1300	2,14 Kg

stringers


open section stringer made with galvanised steel,
Clip-On / Screw Down System with PVC washer.

T536/A 30 x 25 x thk sp. 1 mm
T536/L 30 x 25 x thk sp. 0,7 mm
TT535 20 x 30 x thk sp. 0,8 mm

FLOOR SYSTEM **IF**

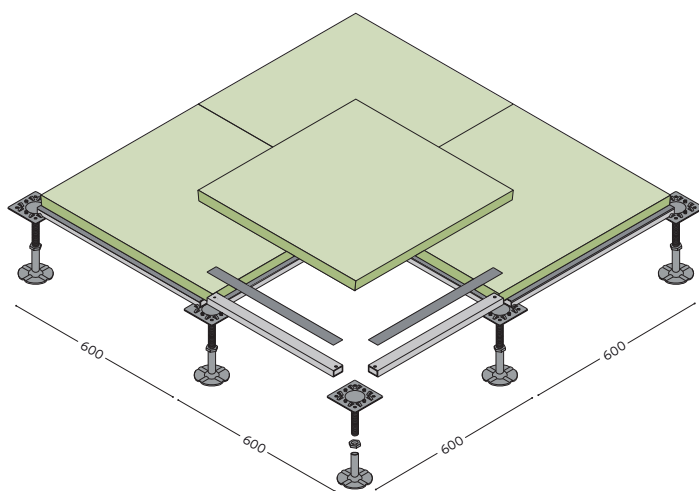


TT535



adjustable pedestal

IF



code	height/mm	weight/pcs
IF1622	160/220	0,70 Kg
IF2128	210/280	0,75 Kg
IF2734	270/340	0,80 Kg
IF3339	330/390	0,85 Kg
IF3844	380/440	0,90 Kg
IF4349	430/490	0,95 Kg
IF4854	480/540	1,00 Kg
IF5359	530/590	1,05 Kg
IF5873	580/730	1,25 Kg
IF7287	720/870	1,40 Kg
IF8699	860/990	1,70 Kg

stringers

open section stringer made with galvanised steel,
Screw Down System with PVC washer.

TT536 20 x 30 x thk sp. 1 mm

FINISHES

ANTISTATIC HPL _ STANDARD

available sizes: 600 x 600 mm




577 grey



576 ivory




1666 beech

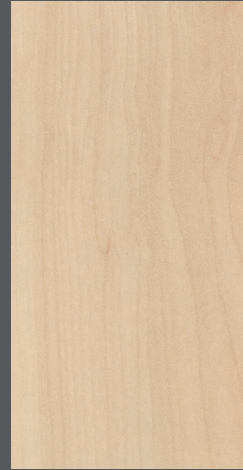

1611 maple



1329 doussié

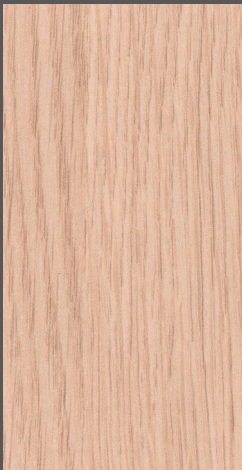

650 oak texas



2810 cement



616 walnut sabec



1385 ash white



1661 oak



671 rustic beech



548 rocks piasentina



546 rocks tivoli

Other types of antistatic HPL available on request. The standard coverings used are all original Abet Walkprint finishing type SEI.

FINISHES

ANTISTATIC PVC - MIPOLAM CLASSIC

available sizes: 600 x 600 mm thickness: 2,0 mm




0003 ivory



0010 azure



0120 borneo

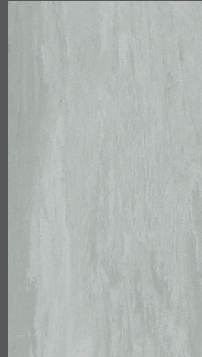

0108 pepper




0002 platinum

DISSIPATIVE FLOORING - MIPOLAM ROBUST EL7 STATIC

available sizes: 600 x 600 mm thickness: 2 mm




0002 platinum

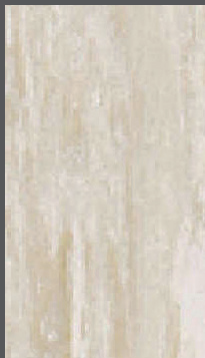


0003 ivory



0005 steel

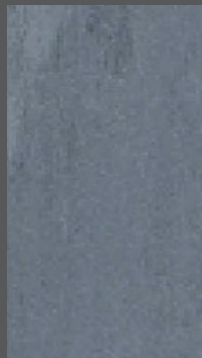

0013 pewter

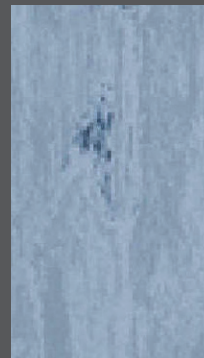


0112 storm



0306 green

CONDUCTIVE PVC - MIPOLAM TECHNIC EL5


available sizes: 600 x 600 mm thickness: 0,9 mm

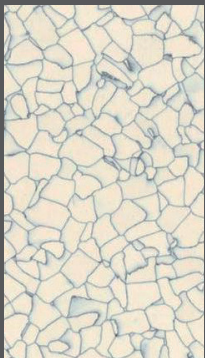


0635 white




0636 grey

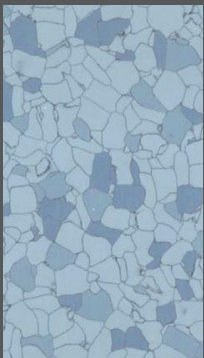


0637 light blue

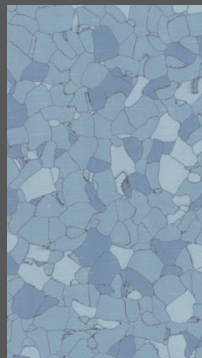

0638 blue

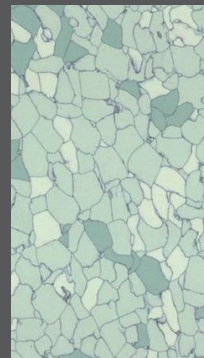

0639 green

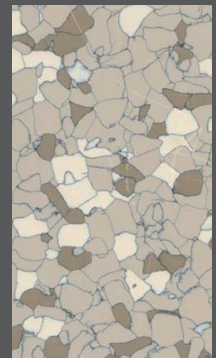


0640 beige


FINISHES

LINOLEUM

available sizes: 600 x 600 x 2,0 / 2,5 / 3,2 mm

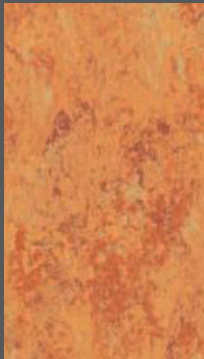


amber

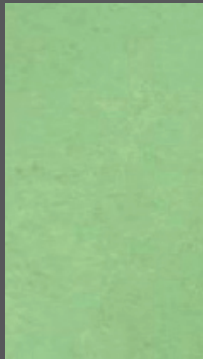

applegreen



begonia

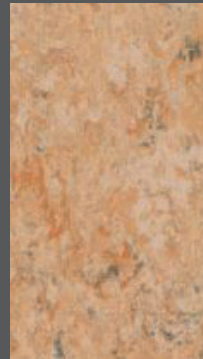


camel




charcoal




coral

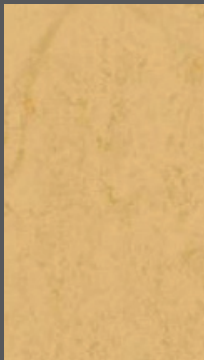

corn

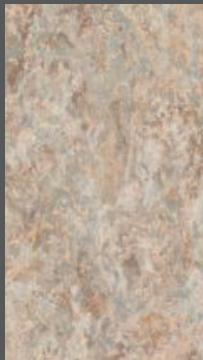


durango

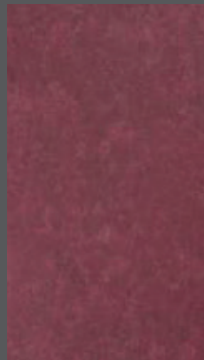

granata



graphite

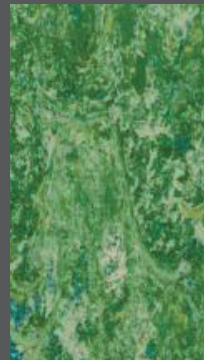

grass



hyacinth




mint




navy




ocean

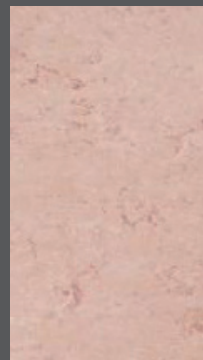

pale pink

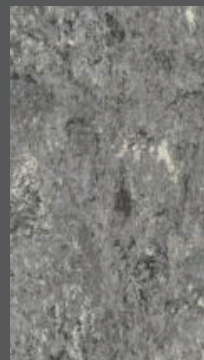


pebble

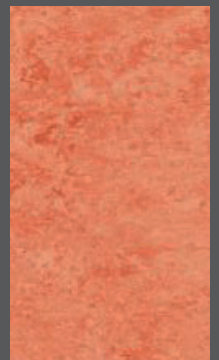

salmon



silk

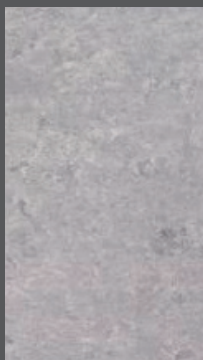


storm



terracotta



tiger eye

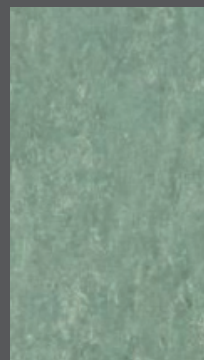

willow green




white

The linoleum tiles used from CBI Europe are all original Tarkett. Other types of linoleum, available on request

FINISHES

SOLID WOOD PARQUET _ ESSENCES


available sizes: 600 x 600 mm standard thickness: 4 mm · other thickness on request

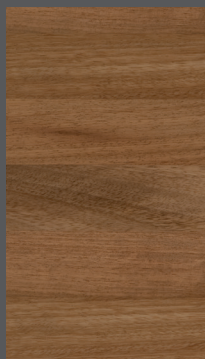


iroko




oak

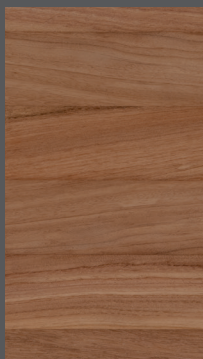


doussié africa

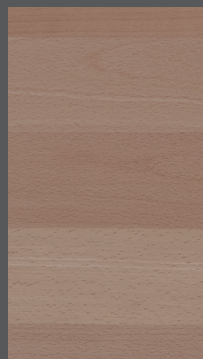

beech

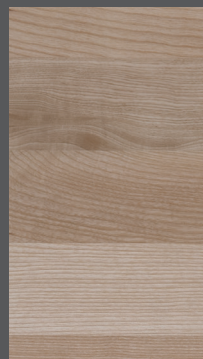

ash

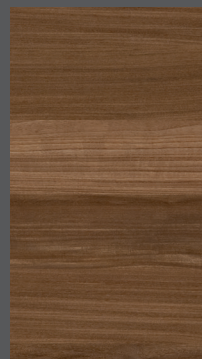


afromosia




teak




europe cherry

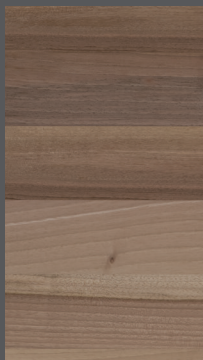

europe walnut

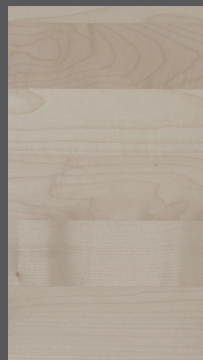


europe maple

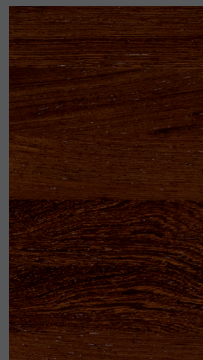


wengé

PARQUET DESIGN


available sizes: 600 x 600 mm standard thickness: 4 mm · other thickness on request · other types of solid wood parquet available on request




quarterdeck



mosaic




main deck



friuli

SOLID WOOD BAMBOO

available sizes: 600 x 600 mm standard thickness: 5 mm

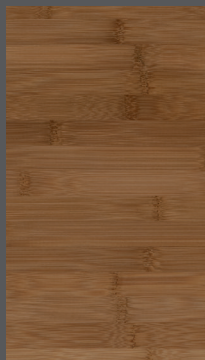

oak bamboo




ash bamboo

Other types of solid wood parquet available on request


ACCESSORIES

RAMPS AND CONNECTION STEPS




R/RAC

*mdf, connection step with anti-slip black rubber



G/Gan

*mdf, connection step with anti-slip black rubber



extruded aluminium molding

A/ALL

● 436 grey

vertical upstand


FTN/12

○ 422 white ● 436 grey

● 421 black

*other ramp finishes available on request: HPL, PVC, linoleum


PERFORATED PANEL



AF1

AF2

perforated panel for ventilation



600 x 600 mm

AF1

holes $\varnothing$ 8 mm $S=1.45 \text{ dm}^2$ -20%


holes $\varnothing$ 10 mm $S=2.26 \text{ dm}^2$ -15%

AF2

holes $\varnothing$ 8 mm $S=2.72 \text{ dm}^2$ -20%

holes $\varnothing$ 10 mm $S=4.27 \text{ dm}^2$ -15%

ALUMINIUM VENTILATION GRID




GRS/150

GRS/300

GRS/600

aluminium ventilation grid with dumper for air regulation




GRS/150 600 x 150 mm

GRS/300 600 x 300 mm


GRS/600 600 x 600 mm

ELECTRICAL OUTLET BOX



TS/8

electrical outlet box




TS/8

electrical outlet box, 8 partitions

> available on request 16 modules version

PERIMETRAL GASKET FOR FIXING



X105

*perimetral gasket for fixing




X105/30 5x30 mm lenght 28 ml/rool

X105/40 5x40 mm lenght 28 ml/rool


*one-component polyuretane based foam available on request instead of the perimetral seal

SKIRTING




BT/PVC
perimeter skirting

○ 422 white ● 436 grey
● 421 black




BT/PVC 60/80 x 5 x 3000 mm

SELF-ADHESIVE ALUMINIUM




SA/ALL
SA/ALL.1
self-adhesive aluminium tape
euro class A1 incombustible



SA/ALL/30 30 x lenght 50 ml/rool
SA/ALL/40 40 x lenght 50 ml/rool

MODULARITY

panel



The standard
600 x 600 mm
format effectively
optimises usage.

incidence

surface	panel	pedestal	stringer
25 mq	3,3	4,0 pz/mq	7,2 pz/mq
50 mq	3,3	3,5 pz/mq	6,4 pz/mq
100 mq	3,3	3,3 pz/mq	6,2 pz/mq
200 mq	3,3	3,2 pz/mq	6,1 pz/mq
400 mq	3,3	3,2 pz/mq	5,9 pz/mq
1000 mq	3,3	2,8 pz/mq	5,6 pz/mq

The average incidence is theoretic. It changes according to the dimension and shape of the space.

PACKAGING

pedestal

CBIF12	height		CBIF16	height		CR	height	
			CBIO1F16	26/35 mm	80	CR00F16	120/200 mm	50
			CBIO2F16	32/48 mm	80	CR01F16	200/350 mm	30
CBIO3F12	45/65 mm	75	CBIO3F16	45/65 mm	75	CR02F16	350/550 mm	30
CBIO4F12	61/90 mm	60	CBIO4F16	61/90 mm	60	CR03F18	550/800 mm	15
CBIO5F12	83/130 mm	55	CBIO5F16	83/130 mm	55	CR04F20	800/1050 mm	15
CBIO6F12	120/200 mm	50	CBIO6F16	120/200 mm	50	CR05F20	1050/1300 mm	10
CBIO7F12	170/290 mm	40	CBIO7F16	170/290 mm	40			
			CBIO8F16	250/390 mm	30			
			CBIO9F16	350/490 mm	20			
			CBIO10F16	450/650 mm	20			


Pedestal for the IF / IF Plus system are sold individually.

RAISED ACCESS FLOORS: versatile, functional, 100% made in Italy.

CBI Europe is a leading manufacturer of raised access floors, with an output of over a 5 million square metres a year. Thirty years of development and the experience gained from installations in 70 different countries around the world ensure that CBI Europe's raised floor systems solve all the

problems normally caused by incompatibility between architectural restrictions and the perpetual changes demanded by evolving technology.

CBI Europe's floors also create environments with a high level of sustainability and livability.

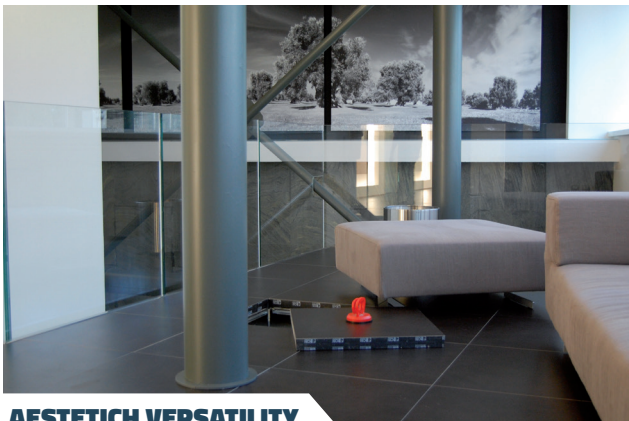

AESTETICH VERSATILITY



LIMITLESS CONFIGURATION



HI-TECH PERFORMANCES

Why

**VERSATILE, HIGH-TECH, SUSTAINABLE,
EASY TO INSTALL AND INSPECT:
THE PERFECT SOLUTION FOR ALL
TYPES OF STRUCTURAL AND DESIGN
REQUIREMENTS.**

Where

**NEW-BUILD AND REFURBISHED OFFICES,
BANKS, OPERATIONS CENTRES,
CONTROL ROOMS, HOSPITALS,
HOMES AND PUBLIC BUILDINGS.**

Benefit

- **ACHIEVING FLEXIBLE, COMFORTABLE, CONTEMPORARY AND RESPONSIBLE INTERIORS.**
- **OBTAINING POINTS FOR LEED CERTIFICATION.**
- **SOUNDPROOFED ENVIRONMENTS.**
- **SPEEDING UP CONSTRUCTION.**
- **CONTAINING COSTS OF LABOUR AND MAINTENANCE.**
- **STRUCTURES 100% INSPECTABLE.**
- **INTEGRATION WITH ADVANCED CLIMATE CONTROL, DOMOTICS AND LIGHTING.**
- **PRECISE BUDGETING.**



FIRE REACTION

All products are continually subjected to laboratory tests during the design and testing of certified institutes before sale. The Calcium Sulphate Fully Steel Encapsulated System CBI Europe is the first and only one to have obtained the highest certification of fire resistance: REI 60.



EXTENDED WORKING LIFE & DIMENSIONAL STABILITY

The excellence of the materials used and the production technologies make panels and structures resistant and lasting over time.



ACOUSTIC ABSORPTION

The high density of the materials used contributes to the absorption of sounds, increasing the comfort of the working environments. Upon request they can be supplied with certifications.



WALKING COMFORT

The flexural strength ensures an optimal response to the stresses of foot traffic. Upon request they can be supplied with certifications.



HUMIDITY RESISTANCE

Maintain their dimensional stability even under extreme ambient conditions, and can therefore be installed in environments characterised by high levels of relative humidity and large variations in temperature.



LEED CERTIFICATION

Wood agglomerate or calcium sulphate panels obtained from recyclable raw materials and manufactured in certified and constantly monitored processes to guarantee the highest standards of quality and safety. Each system contributes to obtaining points for LEED certification.



FASTNESS

Light, modular and easy to handle, the systems are designed to guarantee rapid installation, respecting all the requirements of planarity and orthogonality. The inspection of the individual panels allows a significant reduction in time and maintenance costs.



INSPECTABILITY

100% inspectable, giving easy access to water pipes and electrical cables and permitting easy reconfiguration of rooms.



PT30
ALUFOIL BACKING
S-P-03623 EPD®
environdec.com



PT38
ALUFOIL BACKING
S-P-03624 EPD®
environdec.com



PT30V
GALVANIZED STEEL DISH
S-P-03265 EPD®
environdec.com



PT38V
GALVANIZED STEEL DISH
S-P-03626 EPD®
environdec.com



CBI EUROPE Via Mons. A.O. Romero, 14 · 60027 Osimo (AN) Italy
T +39 071 71 08 688 · fax +39 071 71 08 63 · info@cbi-europe.com · www.cbi-europe.com

